


PRO

BITDRIVE® TORQUE

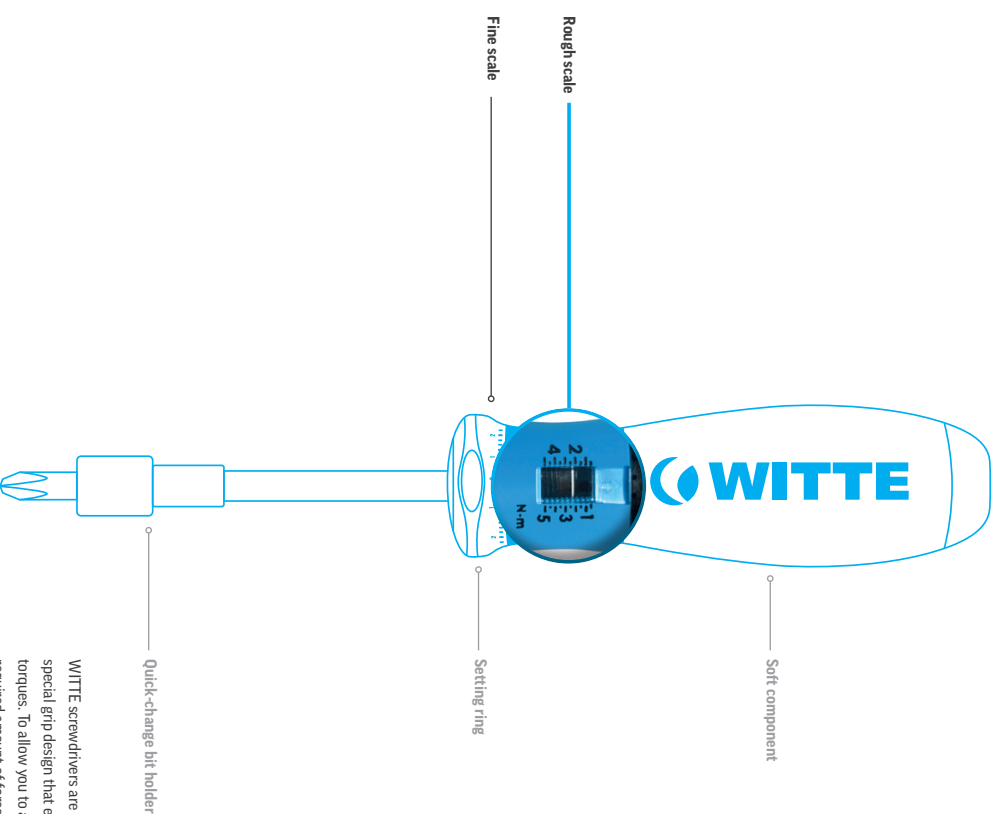

Soft component

Rough scale

Fine scale

Setting ring

Quick-change bit holder

WITTE screwdrivers are renowned for their special grip design that enables maximum torques. To allow you to apply exactly the required amount of force, there is now, with immediate effect, the PRO BITDRIVE® TORQUE with its convenient fast-action torque setting. The quick-change bit holder provides additional security.



BITDRIVE® TORQUE



Easily readable scale
Rough and fine scale for accurate setting of the required target torque.



Convenient setting ring
Fast, easy rotary setting of torques from 1.0 – 5.0 Nm.





468014 PRO BITDRIVE® TORQUE screwdrivers

Torque screwdrivers for torques from 1.0 - 5.0 Nm, individually packed in a transparent box with a hanging hole



PRO

BITDRIVE® TORQUE VDE

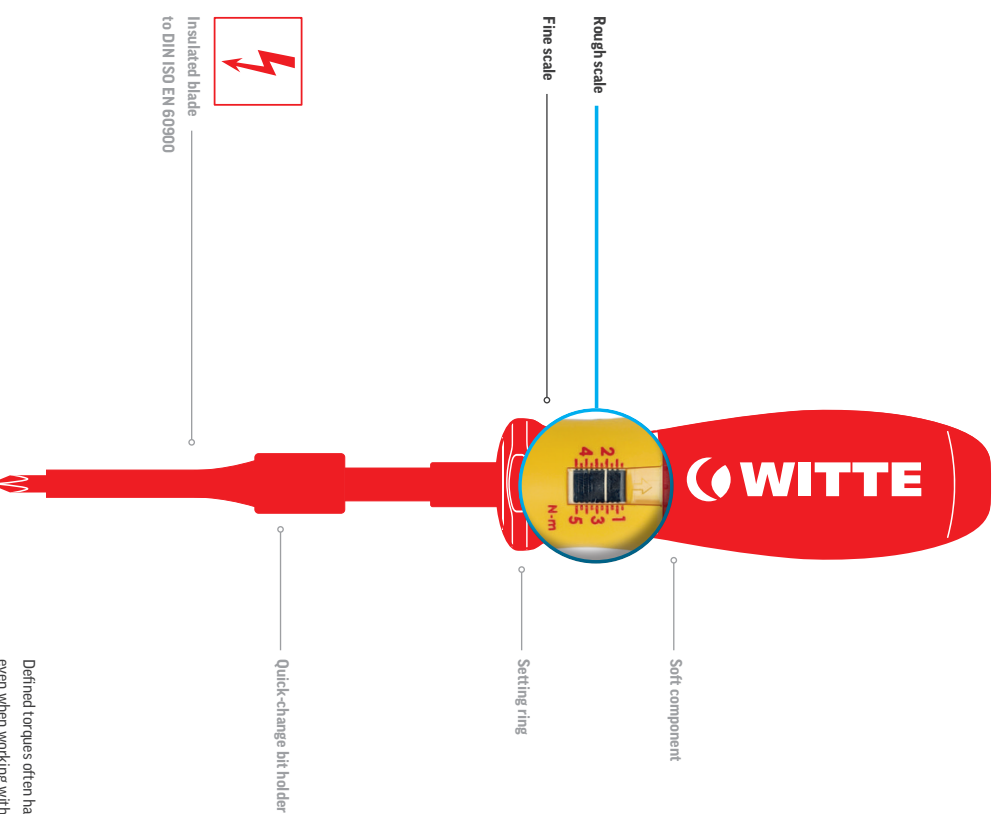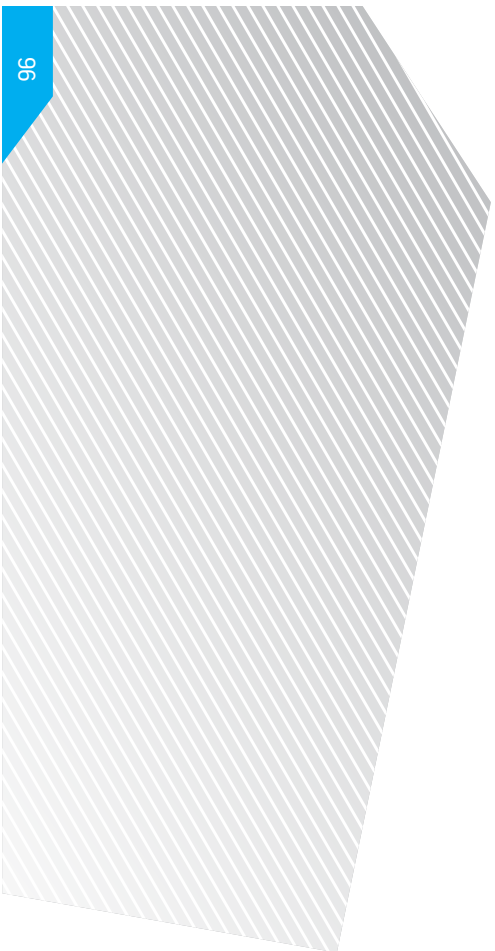


Defined torques often have to be achieved even when working with live components. This is where the BITDRIVE TORQUE VDE comes into play. As an added bonus: replaceable blades are tested to DIN ISO EN 60900.

BITDRIVE® TORQUE VDE



Easily readable scale
Rough and fine scale for accurate setting of the required target torque.



Convenient setting ring
Fast, easy rotary setting of torques from 1.0 - 5.0 Nm.



Safe-change mount
For mounting and changing insulated blades. Tested to DIN EN IEC 60900.

468015 PRO BITDRIVE® TORQUE VDE screwdrivers

VDE torque screwdrivers for torques from 1.0 - 5.0 Nm, individually packed in a transparent box with a hanging hole



incl. PH 2 interchangeable blade

Drive	mm	mm
+	PH 2	100

301272 WITTE BITDRIVE® TORQUE VDE 1 SET

PRO BITDRIVE® TORQUE incl. 5 interchangeable blades in a zip-up wallet



Drive	mm	mm
●	0.5 x 0.3	60
●	0.8 x 4.0	80
●	1.0 x 5.5	80
+	PH 1	80
+	PH 2	100



301282 WITTE BITDRIVE® TORQUE VDE 2 SET

PRO BITDRIVE® TORQUE incl. 5 interchangeable blades in a roll-up wallet



Drive	mm	mm
●	0.5 x 0.3	60
●	0.8 x 4.0	80
●	1.0 x 5.5	80
+	PH 1	80
+	PH 2	100



468010 Interchangeable blades for BITDRIVE® TORQUE VDE

single, packed in polybag



ITEM NO.	Drive	mm	mm
468016	●	0.5 x 0.3	60
468017	●	0.8 x 4.0	80
468018	●	1.0 x 5.5	80
468019	+	PH 1	80
468020	+	PH 2	100

