





Easily readable scale Rough and fine scale for accurate setting of the required target torque.



Convenient setting ring Fast, easy rotary setting of torques from 1.0 – 5.0 Nm.

**468014 PRO BITDRIVE® TORQUE screwdrivers**Torque screwdrivers for torques from 1.0 - 5.0 Nm, individually packed in a transparent box with a hanging hole






# BITDRIVE® TORQUE VDE





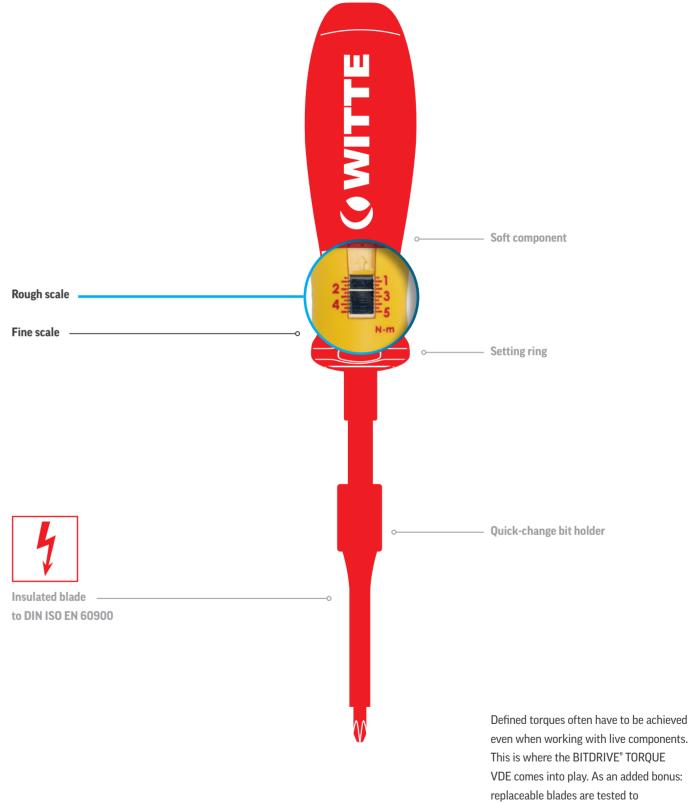

DIN ISO EN 60900.

# BITDRIVE® TORQUE VDE





**Easily readable scale**Rough and fine scale for

accurate setting of the required target torque.



Convenient setting ring

Fast, easy rotary setting of torques from 1.0 – 5.0 Nm.



Safe-change mount

For mounting and changing insulated blades. Tested to DIN EN IEC 60900.

# 468015 PRO BITDRIVE® TORQUE VDE screwdrivers

VDE torque screwdrivers for torques from 1.0 - 5.0 Nm, individually packed in a transparent box with a hanging hole






#### incl. PH 2 interchangeable blade



#### **301272 WITTE BITDRIVE® TORQUE VDE 1 SET**

PRO BITDRIVE® TORQUE incl. 5 interchangeable blades in a zip-up wallet





### 301282 WITTE BITDRIVE® TORQUE VDE 2 SET

PRO BITDRIVE® TORQUE incl. 5 interchangeable blades in a roll-up wallet



Drive	mm	-
•	0.5 x 0.3	
00000	0.8 x 4.0	
•	1.0 x 5.5	
•	PH 1	
•	PH 2	1



## 468010 Interchangeable blades for BITDRIVE® TORQUE VDE

single, packed in polybag





